

# Product Selection > Oven processing

400 °F → 450 °F  
(202 °C → 232 °C)

**Vacuum bag connector**  
VacValve 402  
or VacValve 400

**Quick Disconnect**  
AQD 500 or  
Airlock 550

**Peel ply**  
Release Ply Super F

**Release film**  
Wrightlon® 5200 P3


**Bagging film**  
Securlon® L2000  
Ipplon® WN 1500

**Pressure sensitive tape**  
Flashbreaker®

**Breather**  
Ultraweave®

**Pressure sensitive tape**  
Flashbreaker®

**Sealant tape**  
GS-43MR or  
GS-213-3

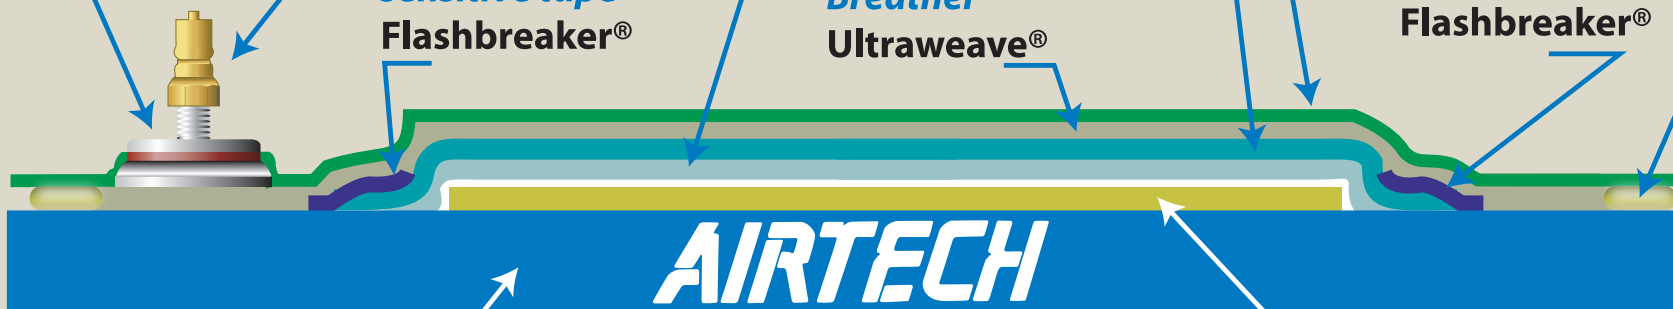

Mold

Fabric reinforcement